


DynaWeight Fall Arrest System

NON-PENETRATING COUNTERWEIGHT SYSTEM



The new DynaWeight Fall Arrest System is the perfect solution for fall protection when circumstances require non-penetrating versatility. This non-penetrating counterweight system sets up quickly and is easy to move.

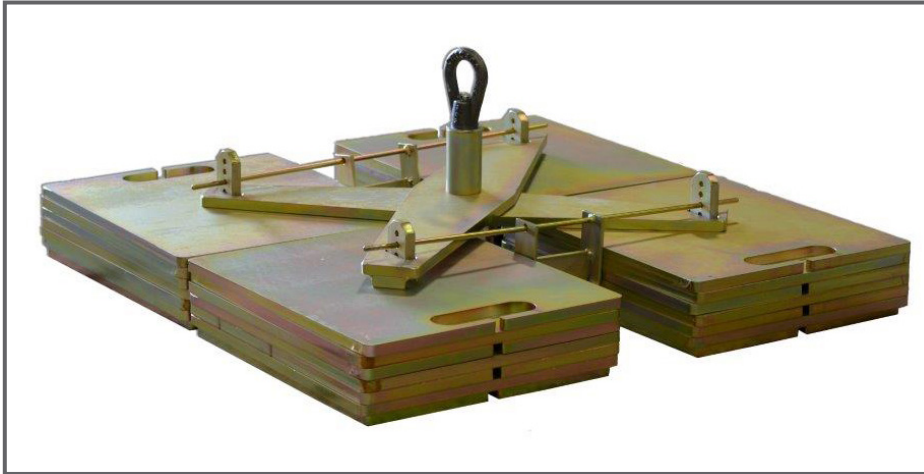

1. Position cart.



2. Raise DynaWeight.

Non-Penetrating Versatility: The fall arrest system is a free standing counterweight design that can be placed on flat surfaces with a maximum incline of 5 degrees. Tested and approved for multiple surfaces such as single ply, BUR, concrete, and modified bitumen membranes. DynaWeight meets fall-arrest ratings for one person weighing up to 310 lbs (including equipment).

Modular Design: The fall arrest system's modular design makes installation easy. The base is set in place and the individual counterweights are stacked into position. No component of DynaWeight weighs more than 30 lbs, so it can be installed by most employees.

Mobility: With the patented, optional transport cart, the system can be moved to a new location quickly and safely by a single person.

Built to Last: Whether you transport the fall arrest system from job to job or use it as a permanent tie off on your rooftop, this system is built to last. With corrosion resistant components, the system will perform for years.



3. Move to new location.

SPECIFICATIONS

Base

Dimensions: 30"x30"x12" (LxWxH)
Weight: Fully Assembled: 765 lbs
Counterweights: 26 lbs each (24 required)

Transport Cart


Dimensions: 97"x58"x24"
Weight: 112 lbs

Safety Ratings

OSHA Spec Certified: 1926.502(d) (16) (iv) Fall Arrest
Fall Arrest Rated: (1) person
Fall Restraint Rated: (1) person
Approved Surface Use: Single Ply, BUR, Concrete, and Modified Bitumen Membranes



ADDITIONAL ROOF SAFETY SOLUTIONS by Fibergrate



DYNAROUND RG™ (ROOF GUARD)

Fibergrate's ballasted rooftop guardrail system is designed for safety and fall protection on roof top applications. Each system is made of durable, weather-resistant fiberglass reinforced plastic (FRP) composite uprights and non-FRP counterbalance weights and connector components. This system meets applicable safety standards in the U.S. and Canada to protect people working at heights.



DYNAROUND HATCH GUARD

This fixed hatch railing system provides permanent means of fall protection for roof hatch openings. This design meets and exceeds OSHA fall protection regulations, and its self-closing and latching gate feature ensures that the opening is protected at all times. The non-penetrating attachment attaches directly to the roof hatch cap flashing, and this solution fits all brands of roof hatches with cap flashing.



DYNAROUND WARNING LINES

This premium, folding warning line system provides visual warning of at-risk areas and meets OSHA regulation 1926.502(f)(2). The standard system includes three folding bases and 100 feet of flags. An optional transport cart allows for portability and storage (holds up to 9 folding warning line systems), and rubber feet attachments for the bases are also available.



CORVEX® MOLDED GRATING WITH RUBBER FEET

Fibergrate FRP corrosion resistant molded grating with our unique Corvex resin system is corrosion resistant, lightweight, easy to install, and slip resistant. Specially designed rubber feet can be added to molded grating, elevating it 1/2" above the surface, offering an economical raised walkway solution.




FRP DYNARAIL® SAFETY LADDERS

The Dynarail ladder line includes FRP ladders, standard walk-thrus, and safety cages. Combining corrosion resistance, long life and low maintenance, Dynarail ladders are superior to conventional metallic systems. Components are lightweight and easy to fabricate which saves on installation labor and equipment.



CROSSOVERS

Fibergrate's crossovers are available in a variety of heights that address most standard clearances creating a cost-effective walkover solution for tanks, pipes or other obstructions. These FRP pre-engineered platforms create a safe working environment, are lightweight and easy to install. Fibergrate offers both stair crossovers and ship stair crossovers which have a steeper angle of climb.



RAPIDECK® EQUIPMENT PLATFORMS

Rapideck equipment platforms utilize Corvex molded grating panels supported by lightweight, high-capacity legs that are fully adjustable to accommodate roofs and uneven gravel bed foundations. Rapideck platforms are corrosion resistant and easy to install (most systems are easily assembled by 2 workers in an hour or less).



STAIR SOLUTIONS

Fibertred® slip molded FRP stair treads can be used for both new or replacement steps. Treads are engineered to exceed OSHA and other model building code standards for safety, strength, durability and corrosion resistance. Fiberplate® stair tread covers are a convenient way to provide solid, slip resistant footing for existing wood, concrete, metal or FRP treads that are still structurally sound.



Phone: 972-250-1633
Fax: 972-250-1530



www.fibergrate.com



info@fibergrate.com

Fibergrate Composite Structures Inc. believes the information contained here to be true and accurate. Fibergrate makes no warranty, expressed or implied based on this literature and assumes no responsibility for consequential or incidental damages in the use of these products and systems described, including any warranty of merchantability or fitness. Information contained here is for evaluation only.
©Fibergrate Inc. 2017-09/06-DynaWeight-Fall-Arrest-System.PDF

