


Micro-Mesh[®] Decking



Fibergrate Composite Structures Inc. is the originator of molded fiberglass reinforced plastic (FRP) grating. Fibergrate continues to lead the industry in innovative products and the ability to provide customized solutions for numerous applications and industries. For five decades, Fibergrate has provided many products to marine, recreational, and commercial customers. As our nation has become more knowledgeable about our marine environments, we have committed to producing products that will provide the best solution for our customer and the environment.

Seagrasses are widely recognized as one of the most productive and valuable habitats in the shallow marine environment. Although the area of the seagrass loss associated with any individual dock is relatively small, cumulative impacts may be significant along highly developed shorelines. With seagrass population in decline in many areas, coastal resource managers are interested in products that reduce additional dock-associated impacts to an already stressed resource.

Fibergrate's Micro-Mesh[®] decking has an open area from 43% to 44.4% which exceeds guidelines set forth by the Army Corps of Engineers* who require a minimum open area of 43% for dock material. The open area consideration is an important factor in protecting the seagrass and other shallow marine habitats, as it allows light penetration through the dock.

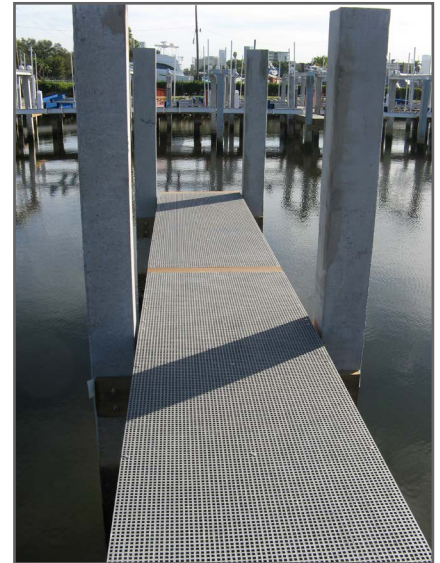

For 1/2", 1" and 1-1/2" grating hold down, use Fibergrate's WLP Clip Assembly.


*USACE guidelines can differ among states and regions. Please verify the open area requirement for docks in your state.

- Meets Army Corps of Engineers Guidelines*
- Maximum UV Resistance
- Storm Surge Friendly
- Depths of 1/2", 1" and 1-1/2" Available
- ADA Compliant
- Corrosion Resistant

Micro-Mesh[®] decking is formulated for maximum UV resistance and is able to withstand corrosion in saltwater and other harsh environments. The square top mesh of the grating has a maximum opening of 1/2" so it meets the Americans with Disabilities Act (ADA) guidelines, thus making it an excellent choice for public area applications.

Micro-Mesh is available in three depth options (1/2", 1" and 1-1/2") and is light gray in color. This lightweight grating is easy to fabricate and install. The aquagrit surface, the most popular for this decking solution, is also slip resistant and barefoot friendly. Fibergrate's Micro-Mesh decking ensures a safe, long lasting and environmentally friendly solution.


Details Micro-Mesh[®] 1/2", 1" & 1-1/2" Deep 3/4" Sq Top Mesh

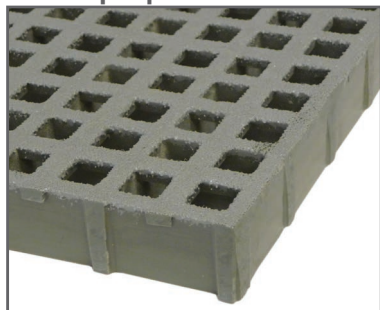


- Barefoot Friendly
- Low Maintenance

Depth	Square Top Mesh	Panel Size	# of Bars/ Ft of Width	Load Bar Width	Open Area	Load Bar Centers	Approx. Weight
1/2"	3/4"±	4' 1" x 13' 1-3/4"	8	1/4"	43%	1-9/16"	2.1 psf
1"	3/4"	4' x 12'	8	1/4"	44.4%	1-1/2"	2.9 psf
1-1/2"	3/4"	4' x 12'	8	1/4"	44.4%	1-1/2"	4.5 psf


Plan View

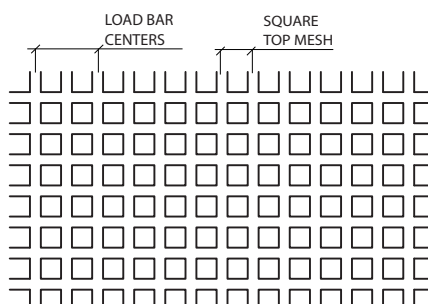

Elevation Views

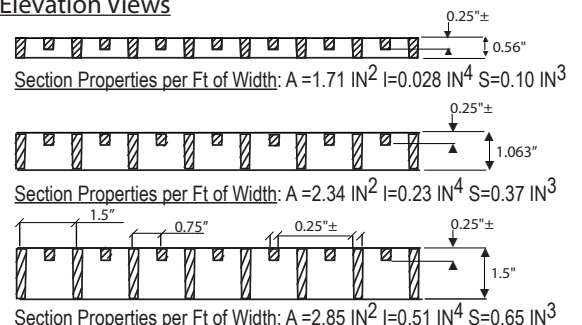

Micro-Mesh® Decking




Uniform Load Table - Deflection in Inches

U Uniform Load - psf
 ΔU Uniform Load Deflection - in

Clear Span (in)	Depth	LOAD (psf)									Maximum Rec. Load (psf)	Ultimate Load (psf)
		50	65	100	150	200	300	500	1000	2000		
12	1/2" (Note 3)	0.01	0.02	0.03	0.04	0.05	0.08	0.13	0.25	--	600	3000
	1"	<0.01	<0.01	<0.01	<0.01	0.01	0.02	0.04	0.08	0.16	1580	6770
	1-1/2"	<0.01	<0.01	<0.01	<0.01	<0.01	0.01	0.02	0.04	0.07	2060	10420
18	1/2" (Note 3)	0.06	0.08	0.13	0.19	0.26	0.38	--	--	--	230	1100
	1"	0.02	0.02	0.04	0.06	0.08	0.11	0.20	0.38	--	700	3170
	1-1/2"	<0.01	<0.01	0.01	0.02	0.03	0.04	0.07	0.14	0.28	910	6940
24	1/2" (Note 3)	0.17	0.23	0.34	--	--	--	--	--	--	110	500
	1"	0.06	0.08	0.12	0.19	0.25	0.37	--	--	--	390	1780
	1-1/2"	0.02	0.03	0.04	0.06	0.06	0.12	0.21	0.42	--	510	4000
30	1/2" (Note 3)	0.43	--	--	--	--	--	--	--	--	70	300
	1"	0.14	0.18	0.27	0.41	--	--	--	--	--	250	1140
	1-1/2"	0.05	0.06	0.09	0.14	0.18	0.27	0.46	--	--	330	2560
36	1"	0.31	0.40	--	--	--	--	--	--	--	170	790
	1-1/2"	0.10	0.13	0.20	0.30	0.40	--	--	--	--	230	1770
42	1"	0.49	--	--	--	--	--	--	--	--	120	580
	1-1/2"	0.17	0.22	0.34	--	--	--	--	--	--	160	1300
48	1-1/2"	0.28	0.37	--	--	--	--	--	--	--	120	1000
54	1-1/2"	0.42	--	--	--	--	--	--	--	--	100	790

Concentrated Line Load Table - Deflection in Inches

C Concentrated Line Load - pounds per foot of width
 ΔC Concentrated Line Load Deflection - in





Clear Span (in)	Depth	LOAD (LB/FT OF WIDTH)							Maximum Rec. Load (lb/ft)	Ultimate Load (lb/ft)
		50	100	200	300	500	1000	2000		
12	1/2" (Note 3)	0.03	0.05	0.11	0.16	0.27	--	--	300	1500
	1"	<0.01	<0.01	0.03	0.04	0.06	0.13	--	790	3560
	1-1/2"	<0.01	<0.01	0.01	0.02	0.03	0.05	0.11	1030	8000
18	1/2" (Note 3)	0.09	0.18	0.36	--	--	--	--	170	880
	1"	0.02	0.04	0.08	0.12	0.20	0.41	--	520	2370
	1-1/2"	0.01	0.02	0.03	0.05	0.08	0.15	0.30	880	5330
24	1/2" (Note 3)	0.19	0.37	--	--	--	--	--	110	580
	1"	0.05	0.10	0.20	0.30	0.49	--	--	390	1780
	1-1/2"	0.02	0.03	0.07	0.10	0.17	0.33	--	510	4000
30	1/2" (Note 3)	0.36	--	--	--	--	--	--	90	460
	1"	0.09	0.18	0.35	--	--	--	--	310	1420
	1-1/2"	0.03	0.06	0.12	0.18	0.29	--	--	410	3200
36	1"	0.16	0.33	--	--	--	--	--	260	1180
	1-1/2"	0.05	0.11	0.21	0.32	--	--	--	340	2660
42	1"	0.23	0.45	--	--	--	--	--	220	1010
	1-1/2"	0.08	0.16	0.32	0.47	--	--	--	290	2280
48	1-1/2"	0.11	0.23	0.45	--	--	--	--	250	2000
54	1-1/2"	0.15	0.30	--	--	--	--	--	230	1770

NOTES:

1. All gratings were tested in accordance with the proposed standard of the Fiberglass Grating Manufacturers Council of the American Composites Manufacturers Association (ACMA).
2. Maximum Recommended Load represents a 5:1 factor of safety on Ultimate Capacity.
3. Deflections for 1/2" Deep Micro-Mesh are for multiple span conditions (three supports or more). To determine the deflection for simple spans (two supports), multiply the values in the uniform load table by 1.9 and in the line load table by 1.4. The Maximum Recommended and Ultimate Loads are unchanged. Deflections listed in the tables above for 1" and 1.5" Deep Micro-Mesh are for simple span conditions.

Clip Assembly

Micro-Mesh grating for decking and docks does require a type WLP clip assembly to secure the grating to a structure. For attachment to concrete, use WLP clips in conjunction with anchor bolts.

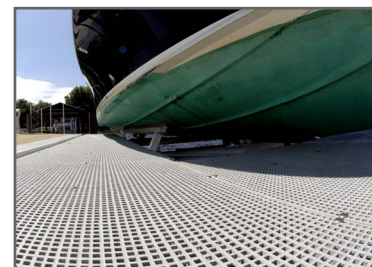

Phone: 972-250-1633
 Fax: 972-250-1530



www.fibergrate.com



info@fibergrate.com

Fibergrate Composite Structures Inc. believes the information contained here to be true and accurate. Fibergrate makes no warranty, expressed or implied based on this literature and assumes no responsibility for consequential or incidental damages in the use of these products and systems described, including any warranty of merchantability or fitness. Information contained here is for evaluation only.
 ©Fibergrate Inc. 2011-05/15-Micro-Mesh.PDF

