

CITY OF LOS ANGELES

CALIFORNIA



ERIC GARCETTI
MAYOR

BOARD OF
BUILDING AND SAFETY
COMMISSIONERS

—
VAN AMBATIELOS
INTERIM PRESIDENT

E. FELICIA BRANNON
JOSELYN GEAGA-ROSENTHAL
GEORGE HOVAGUIMIAN
JAVIER NUNEZ

DEPARTMENT OF
BUILDING AND SAFETY
201 NORTH FIGUEROA STREET
LOS ANGELES, CA 90012

—
RAYMOND S. CHAN, C.E., S.E.
GENERAL MANAGER

FRANK BUSH
EXECUTIVE OFFICER

Fibergrate Composite Structures
5151 Beltline Road, Suite 1212
Dallas, TX 75254

Attn: Michael George
(818) 597-0886

RESEARCH REPORT: RR 25536

Expires: February 1, 2018
Issued Date: February 1, 2016
Code: 2014 LABC

GENERAL APPROVAL – Reevaluation- Fibergrate® FRP RF Panel Enclosure System
for rooftop communication antenna screening

DETAILS

The Fibergrate enclosure system consists of Dynaform® pultruded fiberglass reinforced structural shapes and molded FRP Fiberplate® which spans between the structural supports. Connections between the pultruded shapes and cladding plate are accomplished by means of FRP threaded rod and fiber-reinforced thermoplastic nuts. The material specifications are as follows:

1. Dynaform® Pultruded Structural Shapes: Fiberglass reinforced plastic shapes formed by the pultrusion method. The minimum properties for the pultruded beams are listed in Table 1.
2. Fiberplate® molded FRP plate: Open molded fiber-reinforced plastic plate with bi-directional strength.
3. ½" FRP threaded rod.
4. Fiber-reinforced thermoplastic nut.

RR 25536
Page 1 of 4

Fibergrate Composite Structures

RE: Fibergrate ® FRP RF Panel Enclosure System for rooftop communication antenna screening

The approval is subject to the following conditions:

1. Fiberplate® cladding panels are installed inside a frame of 4" x ½" equal leg angle in the long (horizontal) directions, and 3" x ¾" equal leg angle in the short (vertical direction). Cladding panels are through-bolted to the angle frame by means of ½" FRP threaded rod and fiber reinforced thermoplastic nuts. When support as described above, the allowable load for the 5'-0" x 7'-0" framed panel is 37.7 psf (pounds per square foot).
2. Dynaform® Structural Shapes applied as beams: The design values are in Table 1.

TABLE 1 - Design values for FRP

Property	Direction	Specification
Tensile	Lengthwise Crosswise	5350 psi 945 psi
Tensile Modulus	Lengthwise Crosswise	3.48×10^6 psi 1.45×10^6 psi
Flexural	Lengthwise Crosswise	6685 psi 1825 psi
Flexural Modulus	Lengthwise Crosswise	2.54×10^6 psi 1.13×10^6 psi
Shear	Horizontal	930 psi
½" bolt bearing	Lengthwise Crosswise	5150 psi 1980 psi
Minimum edge distance		1.5 - inch

Note: Design value is based on a factor of safety of 8

3. Complete plans and structural calculations prepared by a California licensed architect or permit issuance civil or structural engineer shall be submitted to the department for approval prior to permit issuance.
4. The Fire Department shall approve all plans for plastic screening on Title 19 buildings.

Fibergrate Composite Structures

RE: Fibergrate ® FRP RF Panel Enclosure System for rooftop communication antenna screening

5. Antennas and screening must not obstruct access to the roof by the Fire Department as required by Sec 57.504.4 of the Los Angeles Municipal Code which states: Roof access. No person shall install or maintain any security barrier such as a barbed wire fence, razor wire fencing, chain link fencing or any other fencing material, cable, aerial, antenna or other obstruction on the roof of any commercial establishment in such a manner as to obstruct or render egress or access hazardous in the event of fire or other emergency.
Exception: Guy wire, rods and aerial antenna masts may be attached to a roof structure having a slope less than 30 degrees provided there is full clearance of 7 feet or more between the roof and said obstruction. Guy wire or rod required to support aerial or antenna masts may be attached to a roof structure a lateral distance from the mast not in excess of one-sixth the height of the mast.
6. The individual rooftop screening panel area in any one plane or approximately the same plane shall be limited to 250 square feet and the total maximum aggregate area of all panels shall not exceed the larger of 3 square feet per foot of building frontage or 5 percent of the area of the roof, with a maximum allowable height of 8 feet above the roof level.
7. Screening material shall be located at least 10 ft from interior property lines.
8. Screening shall not be illuminated or electrified.
9. Each panel shall be identified with LARR #25536 and Fibergrate Composite Structural Label
10. The fabrication will be in accordance with manufacturer's quality control manual. A copy of the quality control manual is on file with Engineering Research Section.

DISCUSSION

The clerical modification is update compliance to 2014 Los Angeles City Building Code and to change the contact person and phone number.

The report is in compliance with the 2014 Los Angeles City Building Code.


The approval is based on tests and requirements listed in the Information Bulletin P/BC 2002-82.

Fibergrate Composite Structures

RE: Fibergrate ® FRP RF Panel Enclosure System for rooftop communication antenna screening

Addressee to whom this Research Report is issued is responsible for providing copies of it, complete with any attachments indicated, to architects, engineers and builders using items approved herein in design or construction which must be approved by Department of Building and Safety Engineers and Inspectors.

This general approval of an equivalent alternate to the Code is only valid where an engineer and/or inspector of this Department has determined that all conditions of this Approval have been met in the project in which it is to be used.

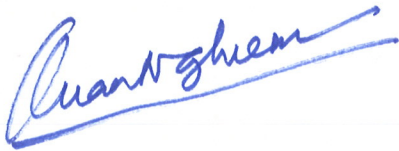

QUAN NGHIEM, Chief
Engineering Research Section
201 N. Figueroa St., Room 880
Los Angeles, CA 90012
Phone- 213-202-9812
Fax- 213-202-9943

en

DE
RR25536/MSWord2010
R01/10/15
TLB1500288
1509/2612